

«Flat line» Patch antenna

430 to 440 MHz

Part Nr. 20901

Electrical data

Radiation at 435 MHz

Effective electrical length: 0.06λ
Isotropic gain: 8.0 dBi
Aperture angle @ -3 dB
- E-plane: $2 \times 38.8^\circ$
- H-plane: $2 \times 41.0^\circ$
First side lobe set
- E-plane: -
- H-plane: -
Rear protection: - 15 dB
Average stray radiation
- E-plane: - 20 dB
- H-plane: - 20 dB

Bandwidth

Gain @ -1 dB: 425 to 445 MHz
Nominal impedance: 50Ω
Impedance match bandwidth @ SWR <1.3/1.....: 430 to 440 MHz
Acceptable RF power (CW/FM/PSK): 150 W

Array of 2 or 4 antennas



(optimized stacking distance. from center to center of elements. for minimal side lobe radiation)

- E plane - Electrical distance: 0.57λ
- Pratical distance: 0.38 m
- H plane - Electrical distance: 0.53λ
- Pratical distance: 0.37 m

Mechanical data

Connector: N
Overall length: 300 x 390 x 50 mm
Mass: 0.5 kg
Effective wind load: 0.11 m^2
Approximate wind load (25 m/s - 55 mph): 4.1 daN
Approximate wind load (45 m/s - 100 mph): 13.3 daN

Radiation patterns

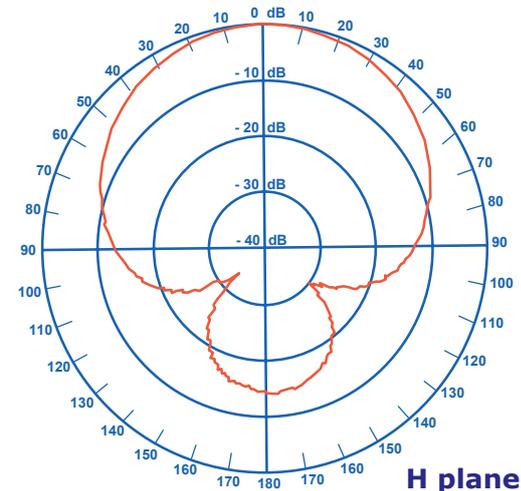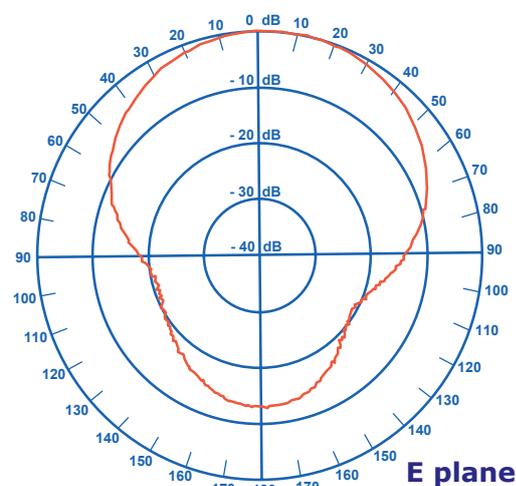

Autoryzowany
Przedstawiciel
w Polsce:

abel
profit
centrum radiokomunikacji

INRADIO
ABEL & PRO-FIT Centrum Radiokomunikacji
ul. Puskina 80 92-516 Łódź Poland
tel. (+42) 649 28 28 fax: (+42) 677 04 71
e-mail: biuro@inRADIO.pl
internet: www.inRADIO.pl

AFT