


9 elements portable yagi antenna

144 to 146 MHz

Part Nr. 20089

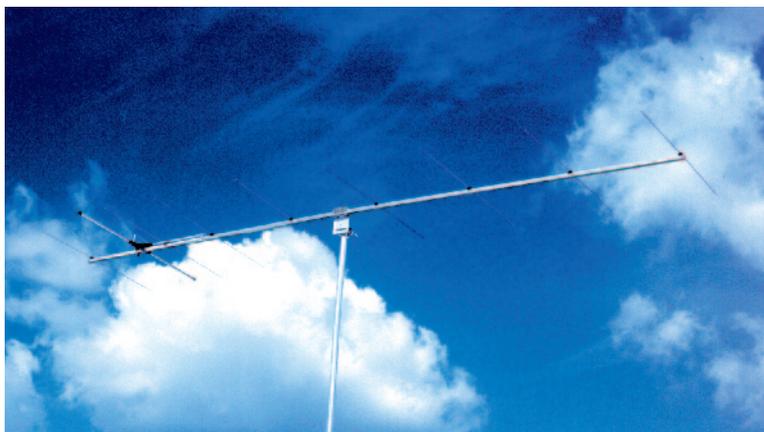

Electrical data

Radiation at 144.5 MHz

Effective electrical length	: 1.65 λ
Isotropic gain	: 13.1 dBi
Aperture angle @ -3 dB	
- E-plane	: 2 x 20.2°
- H-plane	: 2 x 23°
First side lobe set	
- E-plane	: - 20.5 dB @ 54°
- H-plane	: - 13.6 dB @ 58°
Rear protection	: - 19.8 dB
Average stray radiation	
- E-plane	: - 35 dB
- H-plane	: - 24 dB

Bandwidth

Gain @ -1 dB	: 140 to 148 MHz
Nominal impedance	: 50 Ω
Impedance match bandwidth @ SWR <1.3/1.....	: 143.4 to 146.2 MHz
Acceptable RF power (continuous duty)	: 1000 W

Array of 2 or 4 antennas


(optimized stacking distance. from center to center of elements. for minimal side lobe radiation)

- E plane - Electrical distance	: 1.33 λ
- Pratical distance	: 2.77 m
- H plane - Electrical distance	: 1.33 λ
- Pratical distance	: 2.77 m



Mechanical data

Connector	: N
Overall length	: 3.47 m
Mass	: 2.2 kg
Effective wind load	
- Horizontal polarization	: 0.7 m ²
- Vertical polarization	: 0.13 m ²
Approximate wind load (25 m/s - 55 mph)	
- Horizontal polarization	: 2.8 daN
- Vertical polarization	: 5.0 daN
Approximate wind load (45 m/s - 100 mph)	
- Horizontal polarization	: 9.2 daN
- Vertical polarization	: 16.3 daN

SWR curve

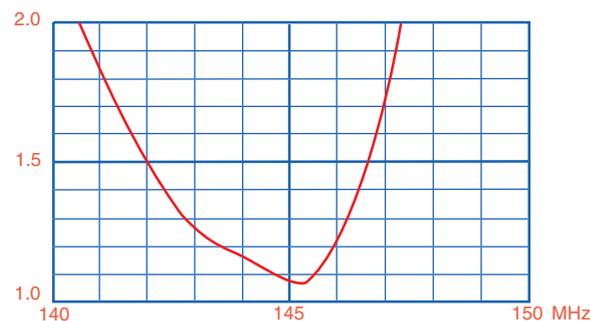

Radiation patterns

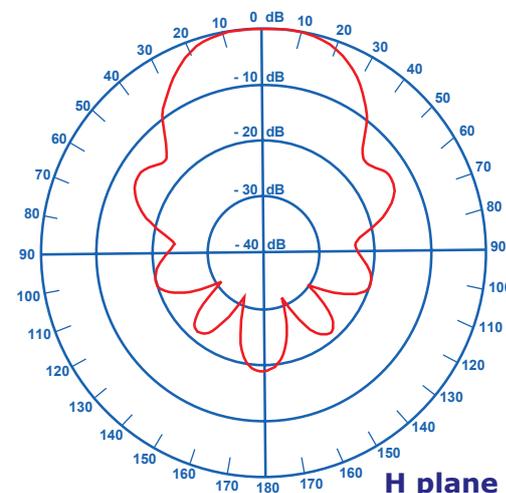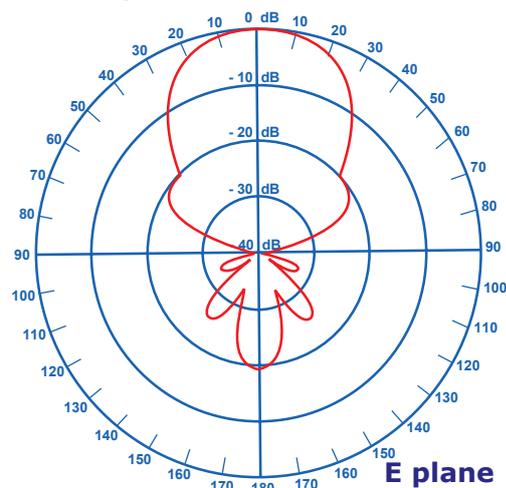

Autoryzowany
Przedstawiciel
w Polsce:

abel
profit
centrum radiokomunikacji

INRADIO
ABEL & PRO-FIT Centrum Radiokomunikacji
ul. Puszkina 80 92-516 Łódź Poland
tel. (+42) 649 28 28 fax: (+42) 677 04 71
e-mail: biuro@inRADIO.pl
internet: www.inRADIO.pl

AFT